

SPECIFICATION



Part No.: NSF-B30W



NEWSTAR LED Lighting

Features

- No UV or IR light radiation.
- Easy Installation
- Correlated Color Temperature:2800-6500K
- AC100~240 V input.
- Working Voltage: DC30-36V
- LED type: 1 Module LED
- IP65 Protection grade
- 3 Years Warranty
- CE, RoHS Certified

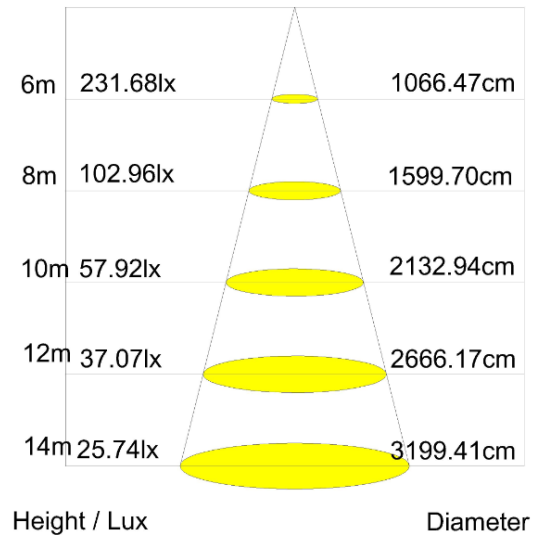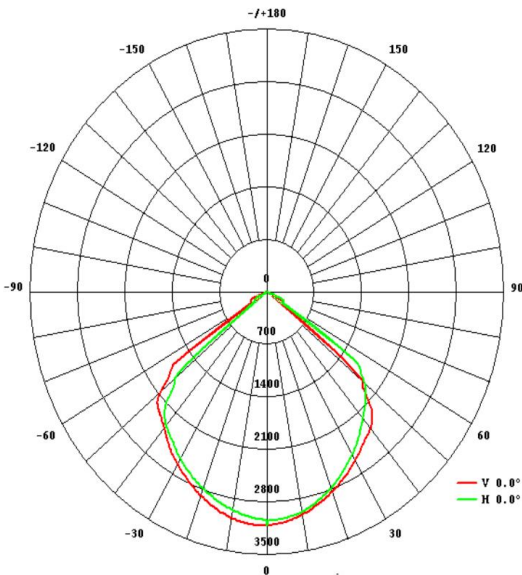

Technical Specifications

Power	30W	CRI	>70
Lumens	2700lm	Color Temperature	2800~6500K
Fixture efficiency	>0.92	Beam Angle	60°-120°
Power Factor	>0.95	Frequency Range	50-60Hz
Light Source	Epistar LED	Dimension	228*225*55mm
Storage Temperature	-25°C ~ +65°C	Working Temperature	-30°C ~+50°C
Body& Lampshade	Aluminum Alloy And PC	Long lifetime	50,000hours

SPECIFICATION

Application

- Shopping mall lighting.
- Exhibition hall lighting
- Parking lot lighting
- Gymnasium lighting
- park, sculpture and national green lighting project
- Tourist attractions lighting
- Green area lighting
- The building elevation of lighting
- Other light sources

