

SPECIFICATION




Part No.: NSF-D30W



NEWSTAR LED Lighting

Features

- No UV or IR light radiation.
- Easy Installation
- Long lifetime: 50000 hours
- Correlated Color Temperature: 2800-6500K
- AC85~265V input.
- Working Voltage: DC30-36V
- LED type: 1 Module LED
- IP65 Protection grade
- 3 Years Warranty
- CE, RoHS Certified

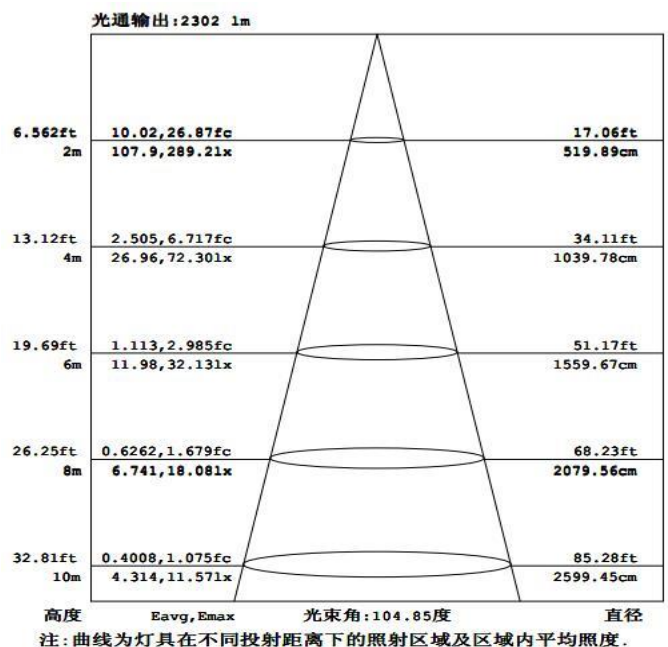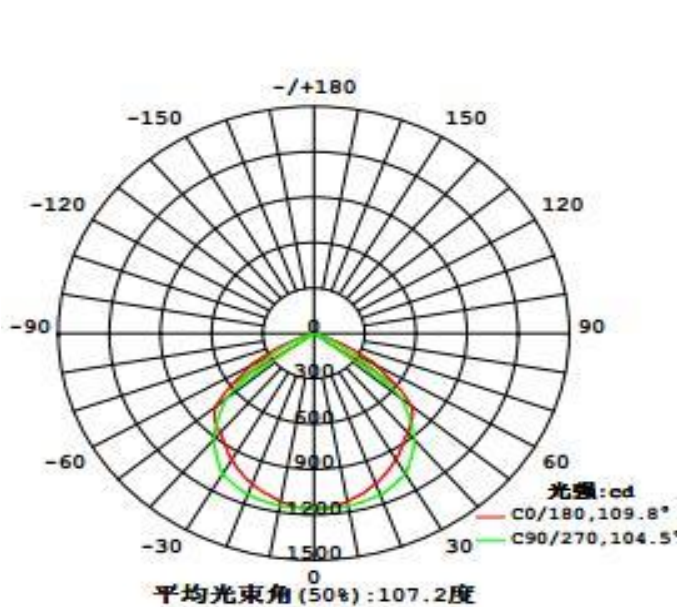

Technical Specifications

Power	30W	CRI	>75
Lumens	2700lm	Color Temperature	2800~6500K
Fixture efficiency	>0.92	Beam Angle	90/120°
Power Factor	>0.95	Frequency Range	50-60Hz
Light Source	Epistar LED	Dimension	215*184*84mm
Waterproof Grade	IP65	Working Temperature	-30°C ~+60°C
Body& Lampshade	Aluminum Alloy And PC	Weight	1.8KG

SPECIFICATION

Application

- Shopping mall lighting.
- Exhibition hall lighting
- Parking lot lighting
- Gymnasium lighting
- park, sculpture and national green lighting project
- Tourist attractions lighting
- Green area lighting
- The building elevation of lighting
- Other light sources

