

SPECIFICATION

Part No.: NSP-R300-24A




NEWSTAR LED Lighting

Features

- No UV or IR light radiation.
- Easy Installation
- Long lifetime: 50000 hours
- Correlated Color Temperature:2700-6500K
- AC100~240 V input.
- Working Voltage: DC18-24V
- LED type: 2835SMD
- Round shaped design
- CE, RoHS Certified



C0 PLANE ISOLUX DIAGRAM (UNIT:LX)

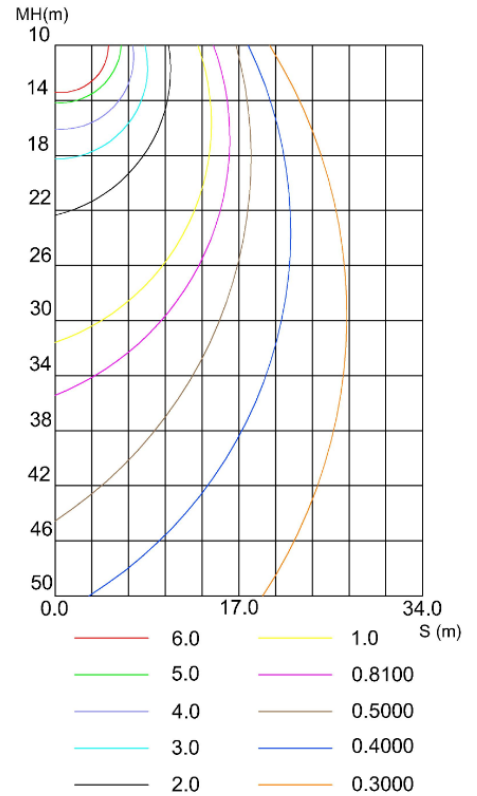

Technical Specifications

Power	24W	CRI	>80
Lumens	1900lm±10%	Frequency Range	50-60Hz
Fixture efficiency	>0.92	Beam Angle	120°
Power Factor	>0.90	Fixing Ways	Mounting
Light Source	2835SMD	Dimension	Φ300*14mm
Appearance color	White/Silver	Hole(mm)	Φ280mm
Body& Lampshade	Aluminum Alloy And PC	Warranty	3 years

SPECIFICATION

Application

- Home and office lighting.
- Hotel lighting.
- Super market lighting
- Warehouse lighting
- Airport lighting
- Factory lighting
- Classroom lighting
- Other light sources

